

## **GOLF CART BATTERY**


## 理工电池 LEOCH BATTERY

#### **Physical Specification** Nominal Voltage 8V Nominal Capacity(20HR) 170Ah Nominal Capacity(5HR) 145Ah Length $260\pm2$ mm(10.24inches) Width $180\pm2$ mm(7.09inches) **Container Height** $248\pm2$ mm(9.76inches) $279.5 \pm 2 \text{mm} (11.00 \text{inches})$ **Total Height** Approx 21.2Kg(46.74lbs) **Dry Weight** Wet Weight Approx 28.2Kg(62.2lbs) Acid $1.280\pm0.015$ g/cm<sup>3</sup>(25°C) Standard Terminal DT-M8(A) PP **Container Material**

# **Electrical Specification**


Rated Capacity	20 hour rate(8.5A)	170Ah
	5 hour rate(29A)	145Ah
Reserve Capacity	25Amps	295min
	56Amps	117min


## **Discharge Characteristics(25℃, 77**°F)

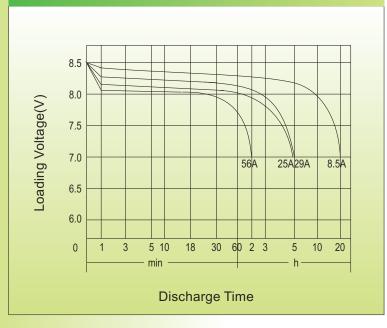



# **DT876(8V170AH)**











### **Charge Method**

#### **Initial Charge:**

 $\bigcirc 10.1C_{20}(A)$  charging 15h

20.05C<sub>20</sub>(A) charging 10h

The temperature of the battery should be below  $50^{\circ}$ C during charging.

#### Supplement Charge:

a) Charging at a constant voltage of 9.8~10V/cell and a limited current  $0.25C_{20}$  (A) until the electrolyte density up to  $1.280g/cm^3(30^{\circ}C)$  and the current not change for 3 hours.

**b)**Charge with constant current  $0.1C_{20}$  (A) until the voltage between  $10.4\sim11.2$ V/cell, and voltage maintains for 3 hours and not change.

Two method optional