




by Schneider Electric

Smart-UPSTM Installation Guide

APCRBC143

Battery Replacement




Always recycle used batteries. For information on recycling the used battery, refer to the Battery Disposal Information sheet included with the replacement battery.


Replace used batteries with APC approved batteries. To order replacement battery APCRBC143, go to the APC Web site, www.apc.com.

Remove the UPS battery


1

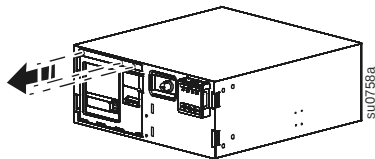


2

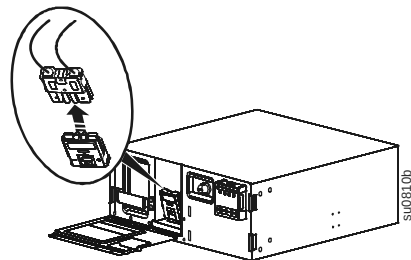

3

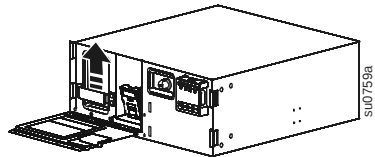


4

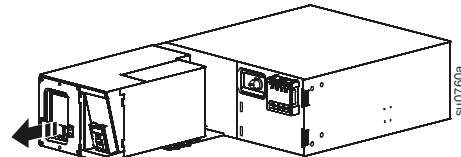


Install the UPS replacement battery


1

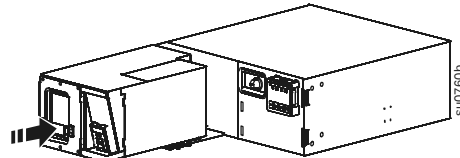

2

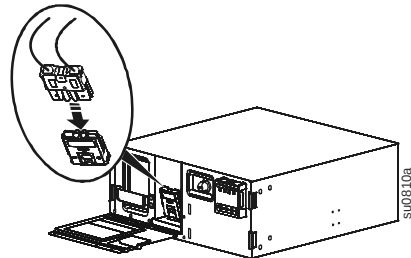


3

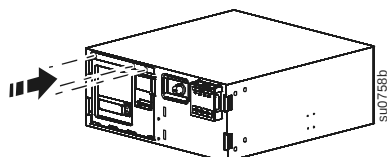


Remove the external battery pack (XLBP) batteries


1

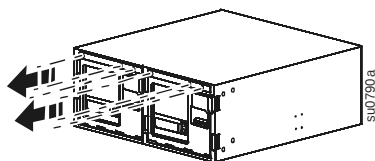


2

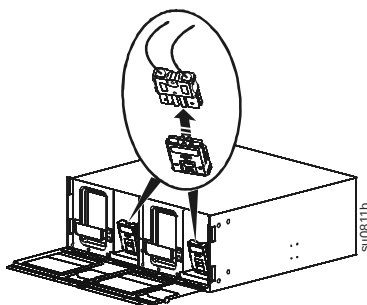

3

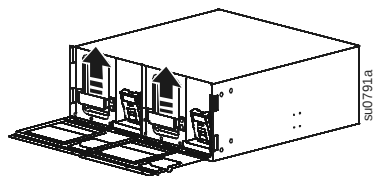


4

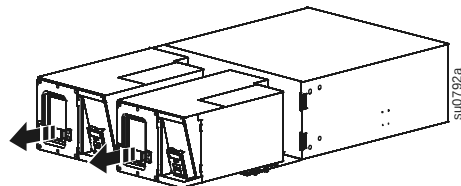


Install the external battery pack (XLBP) replacement batteries


1

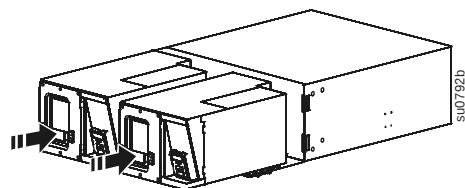


2

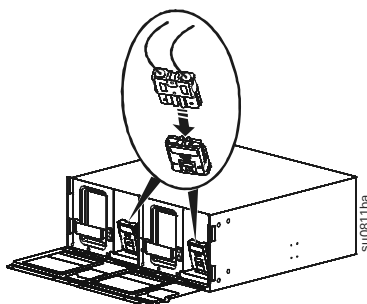

3

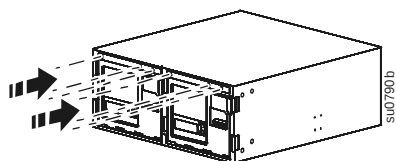

Reset the Battery Install Date



Reset the Battery Install Date for the internal UPS battery.

If the Battery Install Date screen does not appear on the display interface within two minutes of installing the new battery, use the arrow keys to navigate to: **Main Menu > Configuration > Battery Install Date.**

On the Battery Install Date screen, use the arrow keys to select the month, date, and year. Press ENTER to make a selection then move to the next option.

When finished, press ENTER to save the date.

When the RBC is fully charged, perform a self-test and run time calibration test.

Customer support and warranty information is available at the APC Web site, **www.apc.com**.

© 2012 APC by Schneider Electric. APC, the APC logo, and Smart-UPS are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies. All other trademarks are property of their respective owners.

EN 990-4653
4/2012