



### DATA

Voltage	<b>2 V</b>
Performance	<b>1025Ah C10 1.80Vcell 20°C</b>
Float Voltage	<b>2.27V/cell at 20°C</b>
Connection torque	<b>20 - 25 Nm</b>
Max Charge Current	<b>209 A</b>
Weight (Typical)	<b>71.0 KG</b>

### LAYOUT

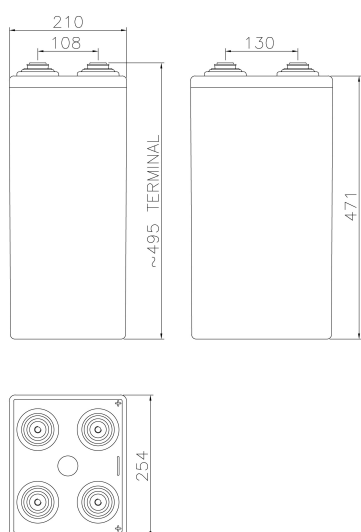

### CONNECTION SET

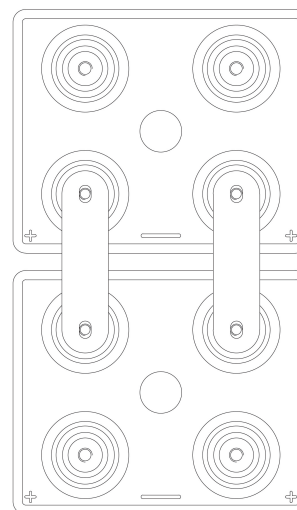

### PERFORMANCES

[A] at 20°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
<b>1,60</b>		2009	1790	1629	1102	830	668	402	294	234	195	167	131	108
<b>1,65</b>		1779	1667	1519	1065	814	660	397	291	233	194	166	130	107
<b>1,67</b>		1662	1569	1455	1038	798	650	393	289	232	193	166	129	107
<b>1,70</b>		1561	1486	1400	1015	785	642	390	287	231	193	165	129	106
<b>1,75</b>		1362	1323	1258	963	754	623	383	283	228	191	164	128	105
<b>1,80</b>		1210	1172	1125	884	707	588	370	277	222	186	160	125	103
<b>1,85</b>		1029	1011	953	754	612	512	340	257	211	176	151	119	97,9
<b>1,90</b>		936	918	871	690	571	484	324	242	198	165	141	112	92,9

[W/cell] at 25°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
<b>1,60</b>		3201	2892	2659	1858	1423	1159	708	522	420	353	303	239	199
<b>1,65</b>		2920	2755	2533	1825	1416	1159	708	522	420	353	303	239	199
<b>1,67</b>		2766	2627	2453	1795	1401	1150	706	522	420	353	303	239	199
<b>1,70</b>		2635	2519	2385	1770	1388	1143	705	522	420	353	303	239	199
<b>1,75</b>		2359	2297	2192	1707	1354	1127	702	522	420	353	303	239	199
<b>1,80</b>		2145	2081	2003	1596	1289	1080	687	517	416	349	301	237	196
<b>1,85</b>		1867	1837	1738	1390	1136	956	641	487	400	335	288	228	190
<b>1,90</b>		1718	1687	1604	1285	1071	911	615	462	378	317	271	216	181