



DATA

Voltage	2 V
Performance	1500Ah C10 1.80Vcell 20°C
Float Voltage	2.27V/cell at 20°C
Connection torque	20 - 25 Nm
Max Charge Current	300 A
Weight (Typical)	105.0 KG

LAYOUT

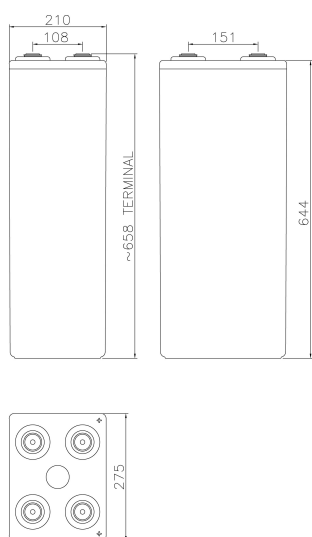

CONNECTION SET

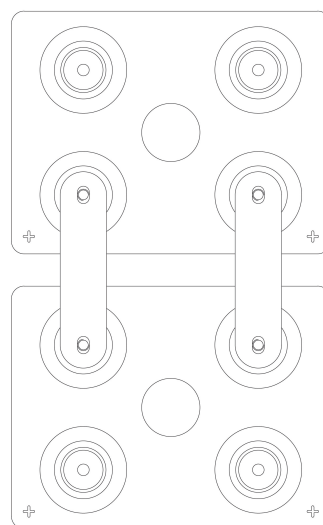

PERFORMANCES

[A] at 20°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
1,60		2065	1836	1635	1231	977	818	524	394	315	266	232	187	155
1,65		1934	1748	1573	1193	961	809	518	391	314	264	231	185	154
1,67		1830	1661	1508	1167	947	800	514	388	312	263	230	185	153
1,70		1742	1587	1452	1145	934	793	512	386	311	263	229	184	153
1,75		1519	1430	1334	1080	901	767	500	378	306	260	227	183	151
1,80		1321	1245	1171	980	833	722	485	368	300	254	222	180	150
1,85		1095	1043	984	855	741	653	445	346	285	240	210	169	142
1,90		989	944	893	767	668	593	416	325	270	229	199	161	135

[W/cell] at 25°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
1,60		3424	3073	2759	2110	1692	1429	927	702	567	481	422	342	287
1,65		3270	2977	2698	2077	1689	1429	927	702	567	481	422	342	287
1,67		3130	2860	2612	2049	1677	1426	927	702	567	481	422	342	287
1,70		3010	2760	2538	2025	1666	1422	927	702	567	481	422	342	287
1,75		2685	2537	2374	1942	1632	1396	918	698	566	481	422	342	287
1,80		2385	2255	2126	1791	1532	1332	903	687	563	476	418	341	287
1,85		2021	1928	1824	1592	1385	1224	841	656	542	457	400	325	275
1,90		1843	1762	1671	1441	1259	1121	792	621	516	438	382	311	263