



### DATA

Voltage	<b>2 V</b>
Performance	<b>250Ah C10 1.80Vcell 20°C</b>
Float Voltage	<b>2.27V/cell at 20°C</b>
Connection torque	<b>10 - 12 Nm</b>
Max Charge Current	<b>50 A</b>
Weight (Typical)	<b>17.0 KG</b>

### LAYOUT

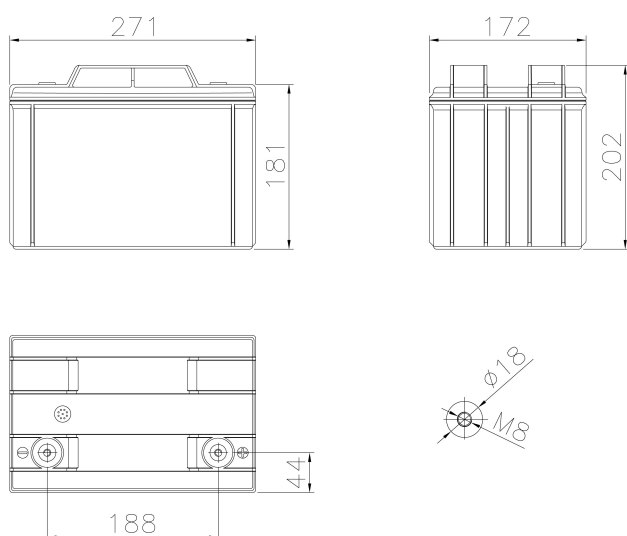

### CONNECTION SET

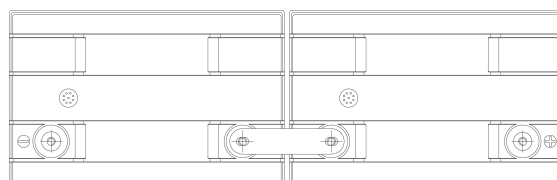

### PERFORMANCES

[A] at 20°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
<b>1,60</b>		750	567	451	286	213	168	93,3	67,6	54,4	45,6	39,5	31,0	25,6
<b>1,65</b>		692	533	429	279	209	165	92,4	67,0	54,0	45,4	39,3	30,9	25,5
<b>1,67</b>		659	513	417	275	206	163	91,7	66,7	53,8	45,1	39,1	30,8	25,4
<b>1,70</b>		631	497	407	272	203	162	91,2	66,4	53,6	45,0	39,0	30,7	25,4
<b>1,75</b>		569	460	381	258	195	156	90,2	65,8	53,1	44,7	38,7	30,5	25,2
<b>1,80</b>		472	396	340	241	181	148	88,2	65,0	52,5	44,2	38,3	30,2	25,0
<b>1,85</b>		398	340	295	211	162	138	83,8	61,5	49,5	41,7	36,7	29,0	24,3
<b>1,90</b>		339	296	262	194	153	128	79,0	57,8	46,4	38,9	33,9	26,9	22,5

[W/cell] at 25°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
<b>1,60</b>		1234	954	770	498	374	296	167	122	99,0	83,3	72,4	57,5	47,9
<b>1,65</b>		1164	913	744	492	373	295	167	122	99,0	83,3	72,4	57,5	47,9
<b>1,67</b>		1120	889	730	489	370	294	167	122	99,0	83,3	72,4	57,5	47,9
<b>1,70</b>		1083	868	719	487	367	294	167	122	99,0	83,3	72,4	57,5	47,9
<b>1,75</b>		998	817	684	468	357	288	167	122	99,0	83,3	72,4	57,5	47,9
<b>1,80</b>		849	718	621	445	336	277	166	122	99,0	83,3	72,4	57,5	47,9
<b>1,85</b>		732	628	548	396	306	260	159	117	94,5	79,7	70,2	55,9	47,1
<b>1,90</b>		631	554	491	368	290	243	151	111	89,2	74,9	65,3	52,2	44,0