



DATA

Voltage	2 V
Performance	580Ah C10 1.80Vcell 20°C
Float Voltage	2.27V/cell at 20°C
Connection torque	10 - 12 Nm
Max Charge Current	116 A
Weight (Typical)	37.0 KG

LAYOUT

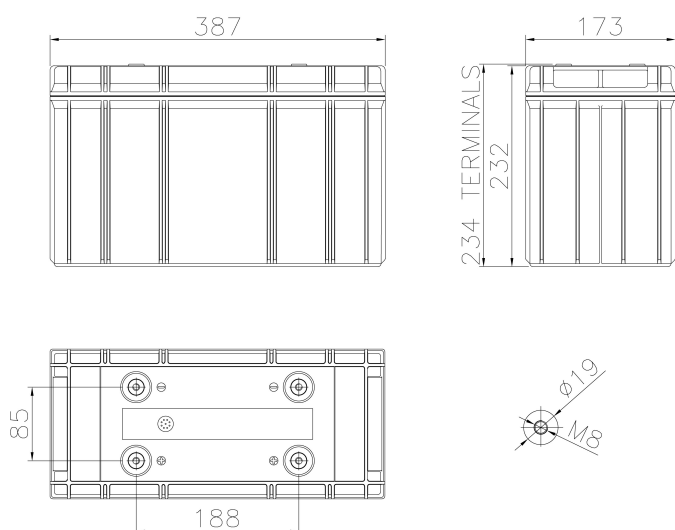

CONNECTION SET

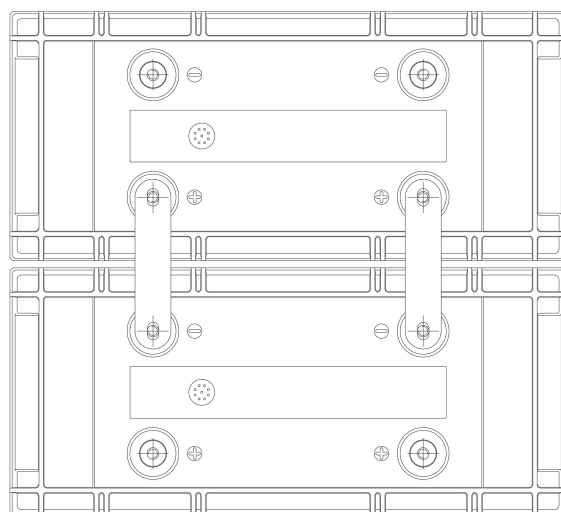

PERFORMANCES

[A] at 20°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
1,60		1493	1220	996	636	478	382	217	155	123	103	89,3	71,4	59,3
1,65		1425	1166	962	618	468	378	215	154	123	102	90,4	71,2	59,2
1,67		1364	1119	928	605	462	373	214	154	122	102	90,2	71,1	59,1
1,70		1313	1078	900	595	457	369	213	154	122	102	90,0	71,0	59,0
1,75		1173	970	837	568	443	362	210	152	121	102	89,5	70,7	58,6
1,80		1007	864	753	540	421	347	206	151	120	101	88,8	70,2	58,0
1,85		866	740	654	489	392	327	194	143	115	96,7	85,1	67,3	56,3
1,90		760	666	594	451	361	299	183	134	108	90,3	78,7	62,4	52,3

[W/cell] at 25°C

V / cell	min.	5	10	15	30	45	60	120	180	240	300	360	480	600
1,60		2515	2081	1715	1113	843	678	389	284	227	191	168	134	111
1,65		2441	2022	1682	1097	836	678	389	284	227	191	168	134	111
1,67		2361	1957	1638	1083	832	674	389	284	227	191	168	134	111
1,70		2293	1902	1600	1072	828	672	389	284	227	191	168	134	111
1,75		2089	1743	1513	1038	813	667	389	284	227	191	168	134	111
1,80		1832	1581	1383	1000	784	648	387	284	227	191	168	134	111
1,85		1605	1379	1223	920	740	619	370	272	219	185	163	130	109
1,90		1423	1252	1120	855	688	572	352	258	207	174	152	121	102