

# ENERGIZER E92


**AAA**



## Specifications

<b>Classification:</b>	Alkaline
<b>Chemical System:</b>	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
<b>Designation:</b>	ANSI-24A, IEC-LR03
<b>Nominal Voltage:</b>	1.5 volts
<b>Nominal IR:</b>	150 to 300 milliohms (fresh)*
<b>Operating Temp:</b>	-18°C to 55°C (0°F to 130°F)
<b>Typical Weight:</b>	11.5 grams (0.4 oz.)
<b>Typical Volume:</b>	3.8 cubic centimeters (0.2 cubic inch)
<b>Jacket:</b>	Plastic Label
<b>Shelf Life:</b>	7 years at 21°C (80% of initial capacity)
<b>Terminal:</b>	Flat Contact


## Industry Standard Dimensions

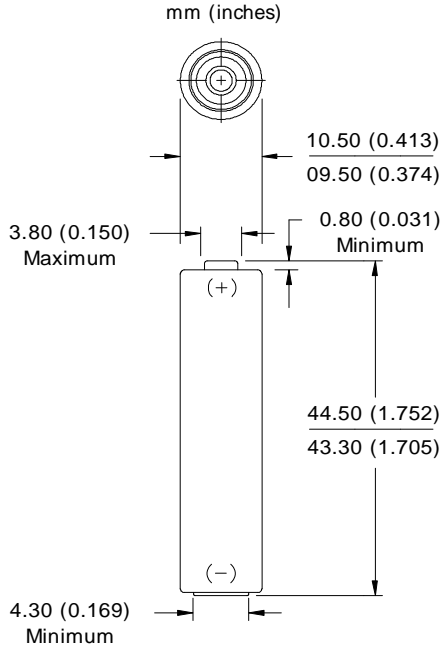

\* For additional information, please reference the [IR technical white paper](#).

## Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

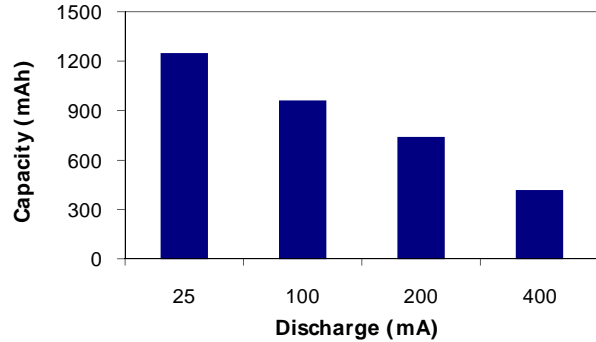

## Device Selection Guide:

### Battery Selection Indicator

Photoflash



Games, Digital Audio



Lighting



Remote Control



Radio



High Drain Devices

Moderate Drain Devices

Low Drain Devices

### Important Notice


This data sheet contains typical information specific to products manufactured at the time of its publication.  
© Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

# ENERGIZER E92

AAA


## Constant Power Performance

Typical Characteristics (21°C)

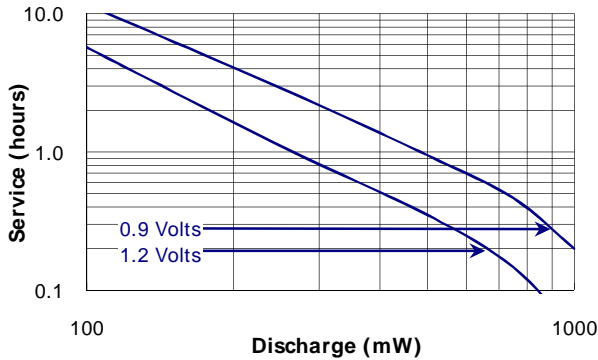


## Constant Current Performance

Typical Characteristics (21°C)

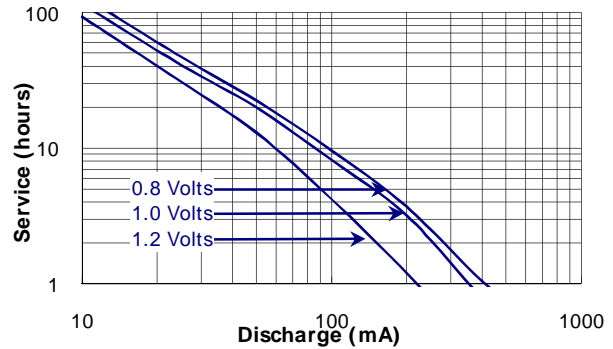


## Constant Power Performance

Discharge Characteristics (21°C)

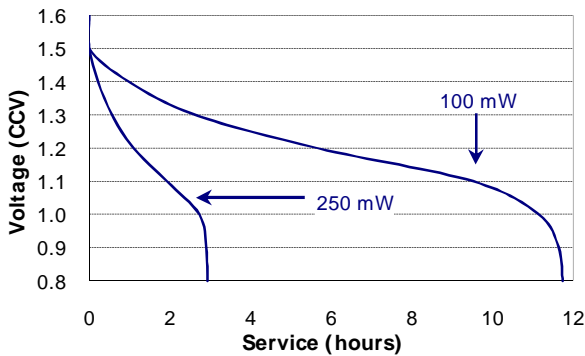


## Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

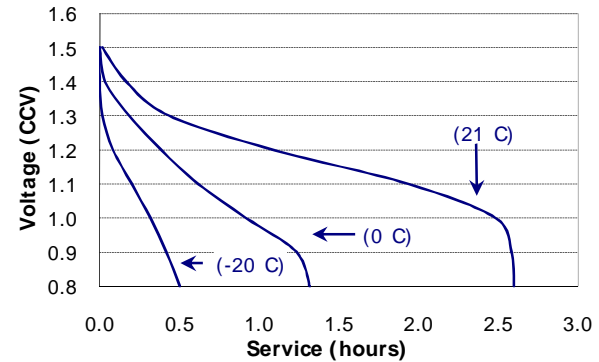


## Industry Standard Tests (21°C)


**LIGHTING**  
5.1 ohm LIF

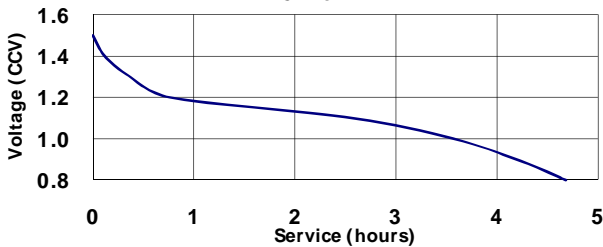


**REMOTE**  
24 ohm 15 sec/ min 8 hrs/ day

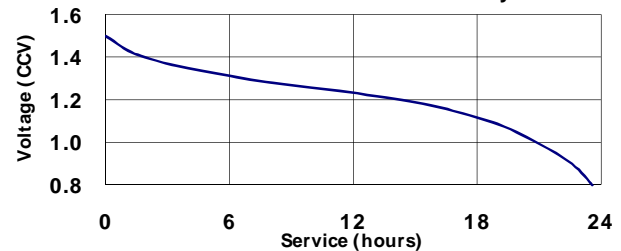

**TAPE-GAME-DIGITAL AUDIO**  
100 mA 1 hr/ day

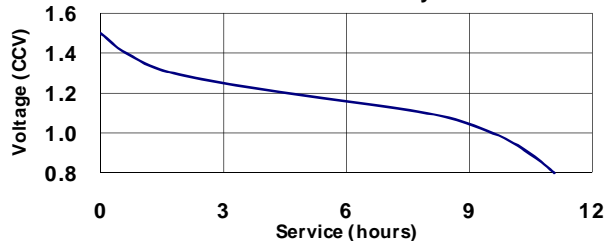

**PHOTOFLASH**  
600 mA 10 sec/ min 1 hr/ day

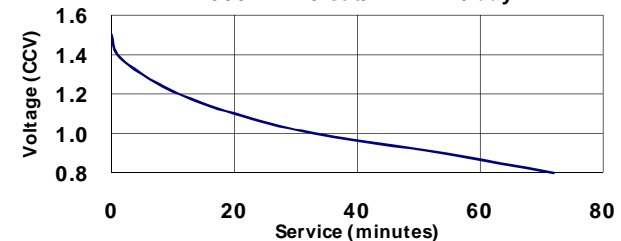

### Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.  
© Energizer Holdings, Inc. - Contents herein do not constitute a warranty.